




ITEM NO.	High-Flow Undersink Water Filter RO - 200G/400G - P01
Capacity	200 G / 400 G
Power	110V/ 220V, 50/60HZ
Housing	122-10Y-W Single "O" Ring Housing
Flush type	Auto Flush
1st Stage	10" PP sediment, to remove dirt
2nd Stage	10" Granulas carbon, to remove chlorine
3rd Stage	10" Block carbon, to further remove chlorine
4th Stage	Reverse osmosis membrane, NSF certificated
5th Stage	Post carbon, to adjust the taste and odor
Machine dimension	330 x 420 x 560 mm



01 PP Spun Fiber

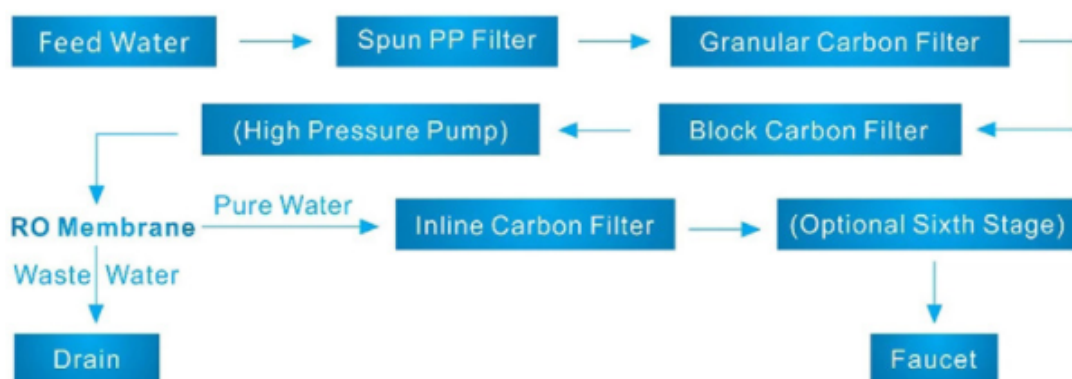

Product Feature

Brand	HIDROTEK
Filter Precision	1µm
Length	25.4cm
Replacement Cycle	4 - 6 months (for reference)

Function

Remove large particles suspended in water.

02 Granular Carbon Filter



Product Feature

Brand	HIDROTEK
Filter Precision	5µm
Length	Standard 10 inch
Replacement Cycle	6 - 12 months (for reference)

Function

Remove organics, chlorine, odor and turbidity.

03 Block Carbon Filter



Product Feature

Brand	HIDROTEK
Filter Precision	1µm
Length	Standard 10 inch
Replacement Cycle	6 - 12 months (for reference)

Function

Further remove organics, chlorine, odor and turbidity.

04 Reverse Osmosis Membrane



Product Feature

Brand	HIDROTEK
Filter Precision	0.0001µm
Replacement Cycle	12-24 months (for reference)

Function

Remove bacteria, heavy metals, dissolved matter and salinity.

05 Inline Carbon Filter



Product Feature

Brand	HIDROTEK
Filter Precision	5µm
Length	Standard 10 inch
Replacement Cycle	6 - 12 months (for reference)

Function

Adjust the taste of treated water.